

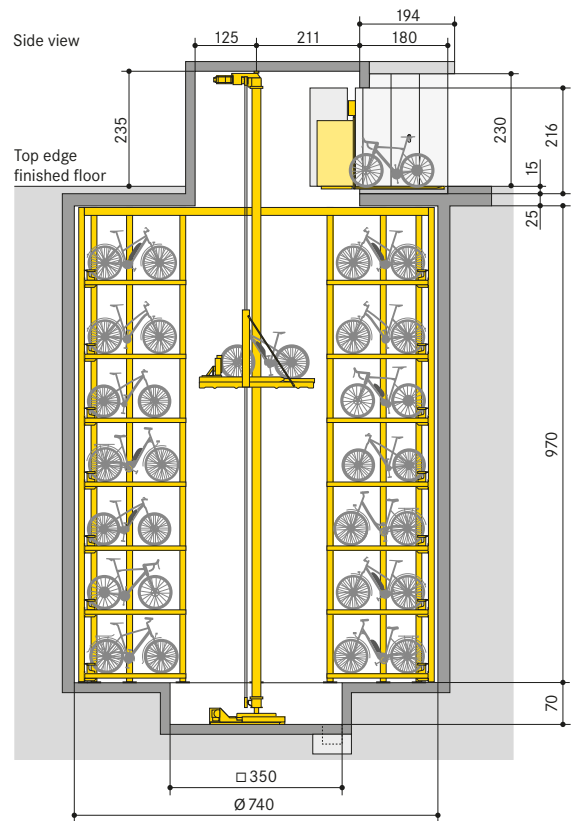


■ WÖHR Bikesafe 885/16 (112 parking places), handlebar width 76 cm

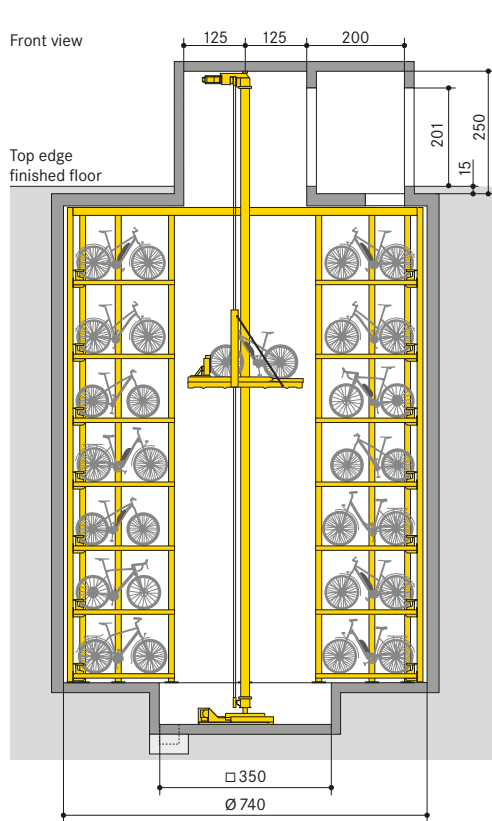


Note: if possible, provide an access door in the shaft area.



Section parking level

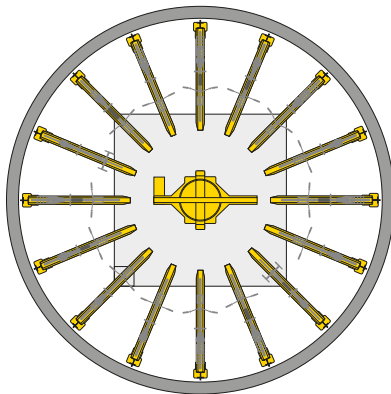



Section entrance level

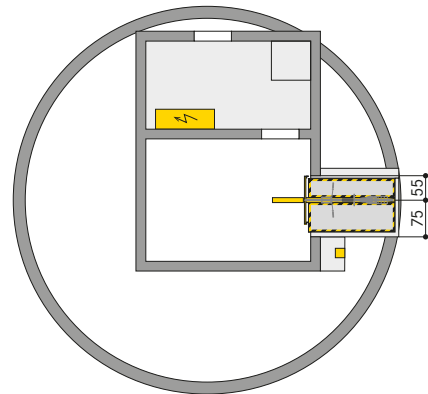



■ WÖHR Bikesafe 885/16 (112 parking places), handlebar width 83 cm

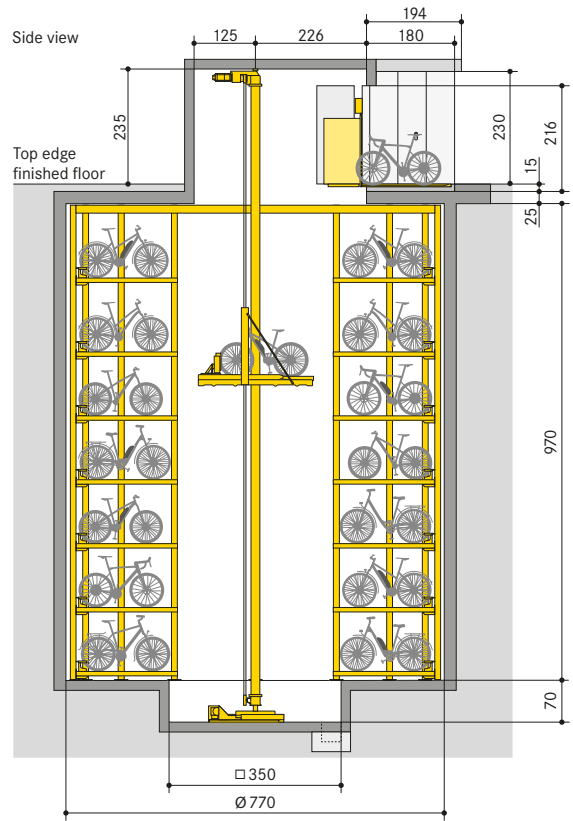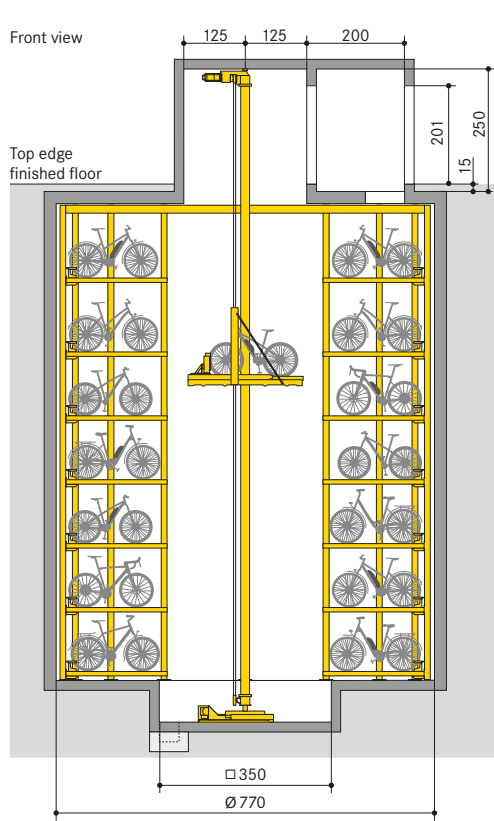



Note: if possible, provide an access door in the shaft area.

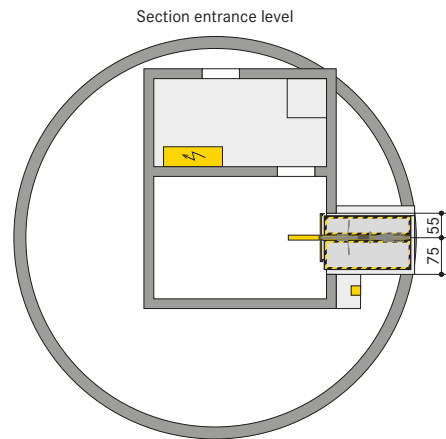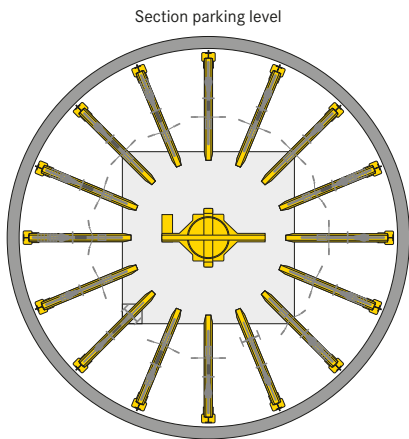



■ WÖHR Bikesafe 885/20 (140 parking places), handlebar width 76 cm

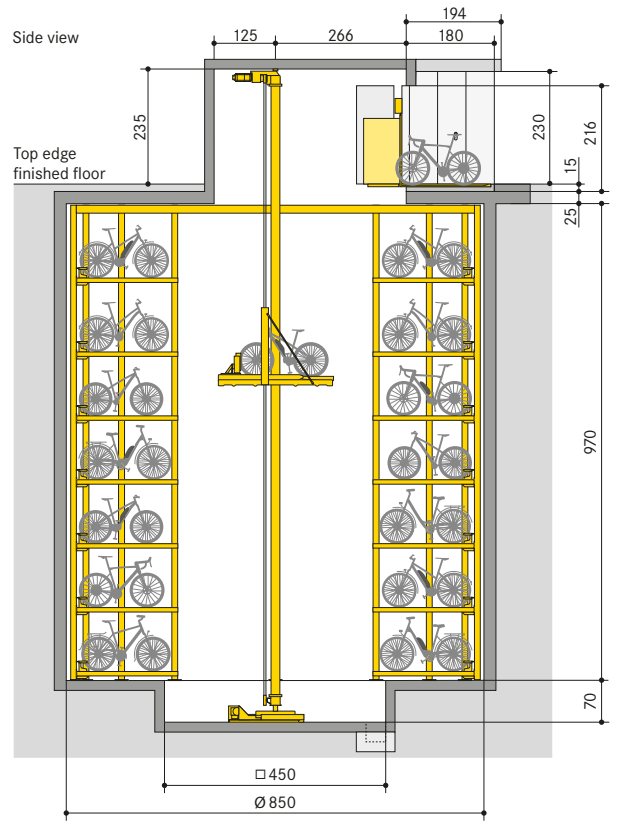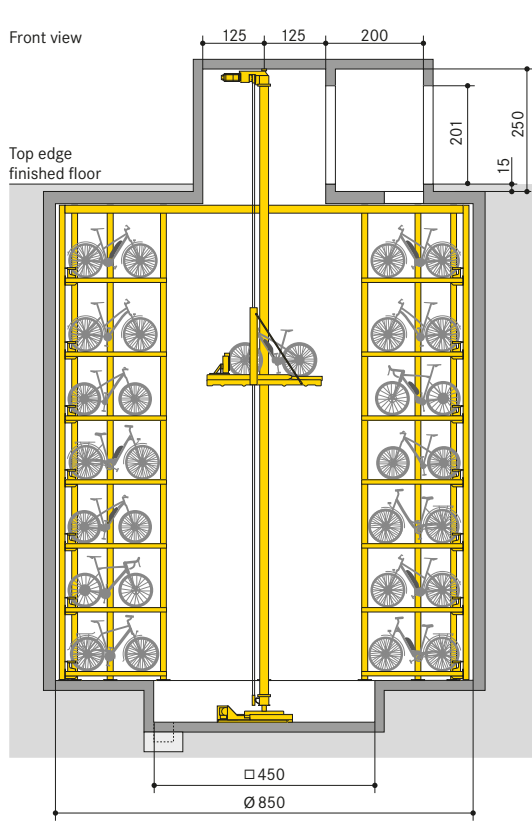



Note: if possible, provide an access door in the shaft area.

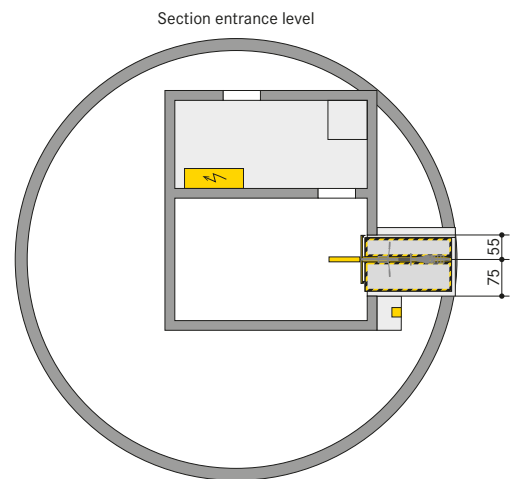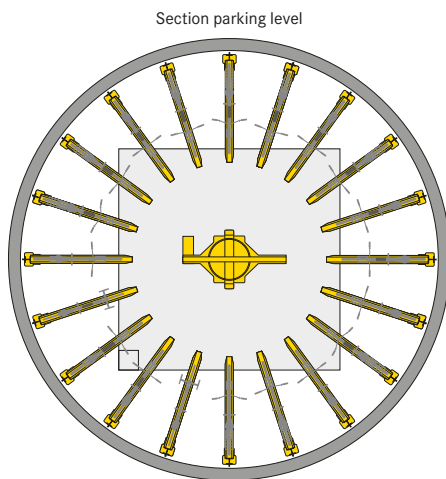


■ WÖHR Bikesafe 885/20 (140 parking places), handlebar width 83 cm

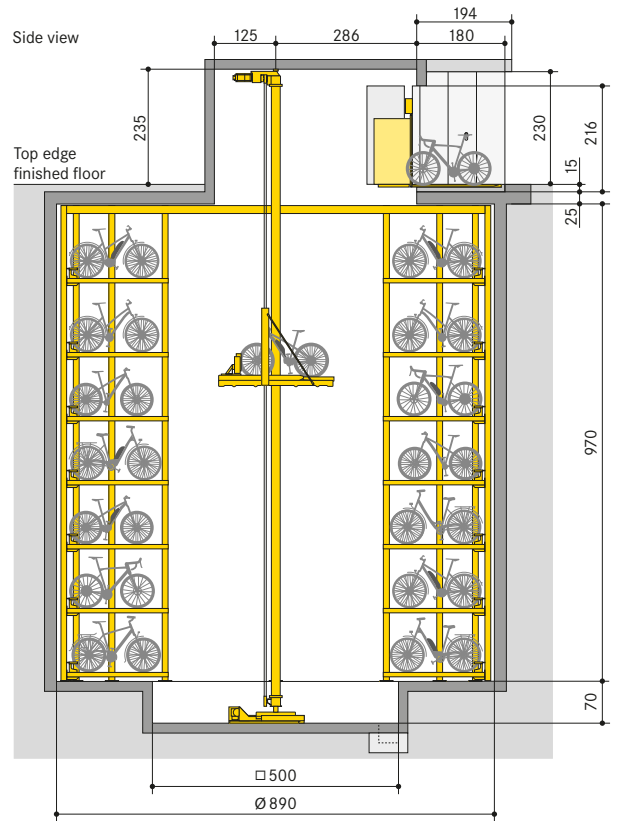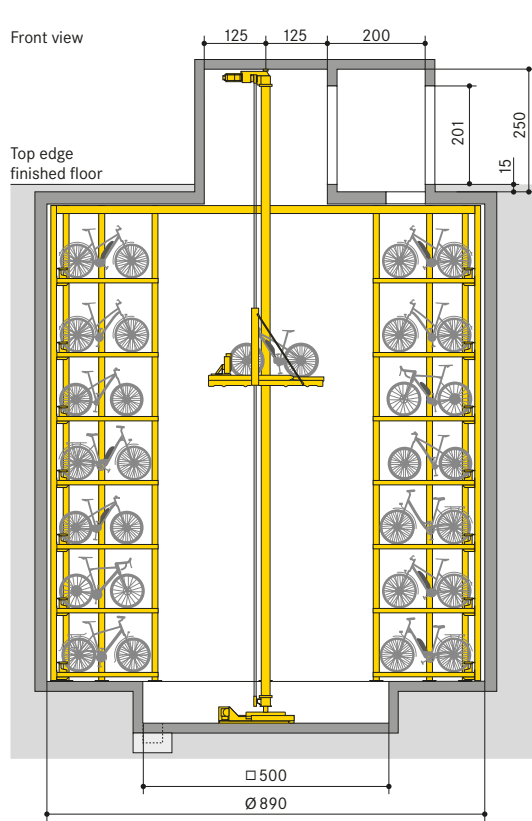



Note: if possible, provide an access door in the shaft area.

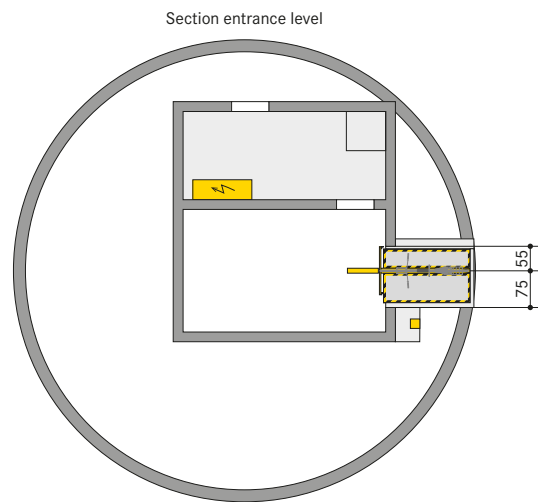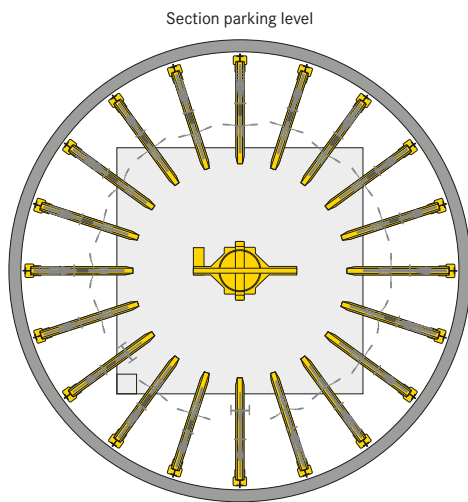


■ WÖHR Bikesafe 885/24 (168 parking places), handlebar width 76 cm

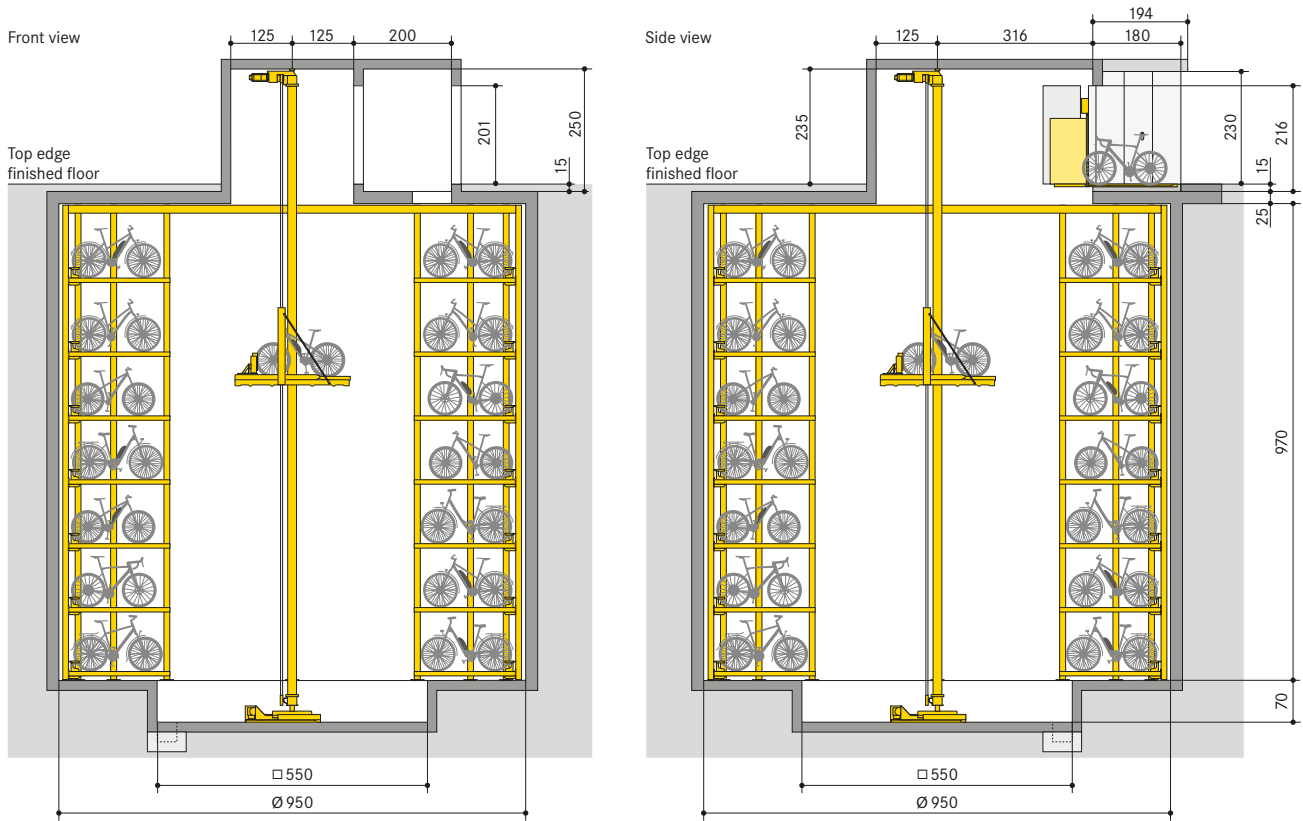

Note: if possible, provide an access door in the shaft area.

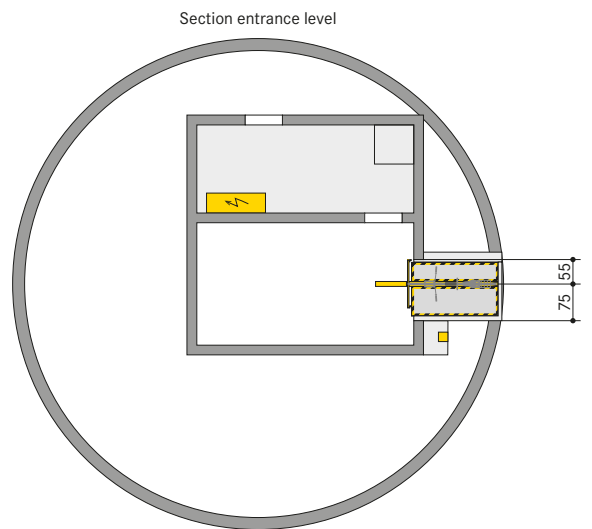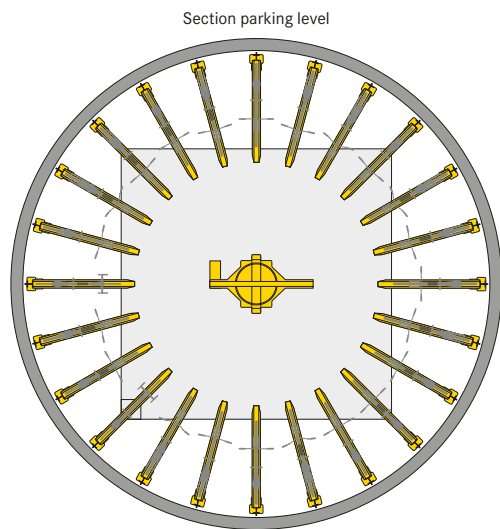

■ WÖHR Bikesafe 885/24 (168 parking places), handlebar width 83 cm

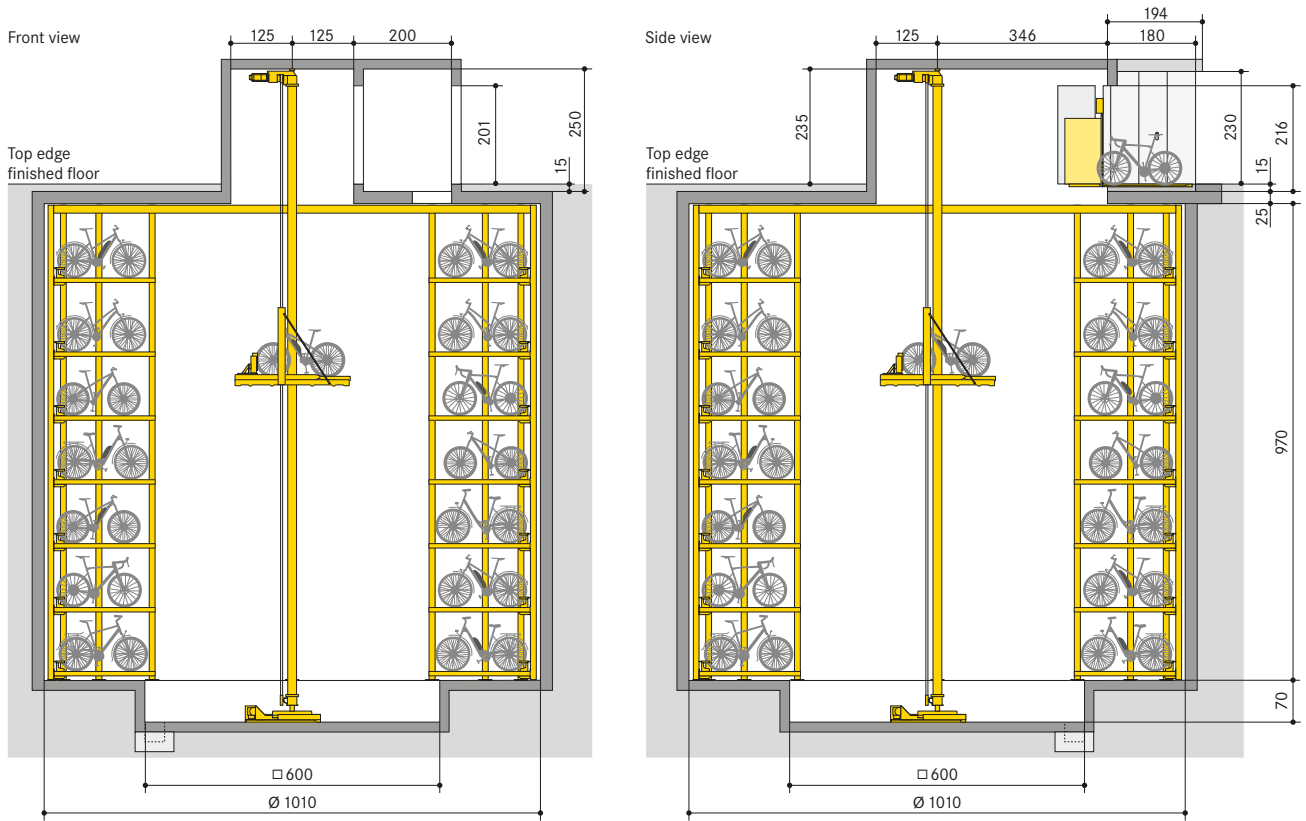

Note: if possible, provide an access door in the shaft area.



■ **Dimensions**

- all dimensions are minimum, finished dimensions
- tolerances must be taken into consideration
- all dimensions are given in cm